


F-14 HELLCAT SK

Driver:		
Date:		Race:
Track:		Runline:
Traction Level:		Carpet Type:


Front End Type: _____

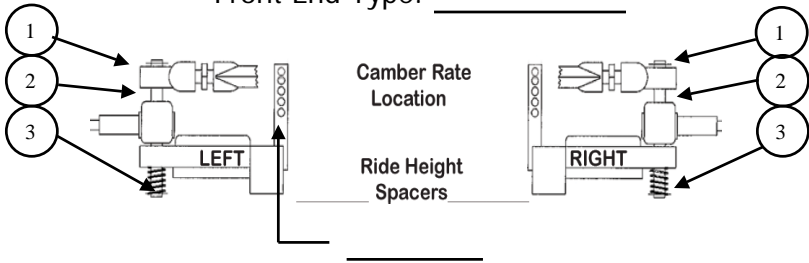

Left	FRONT END:		Right
Spring:		Spring:	
Spring Sag:		Spring Sag:	
Lube:		Lube:	
Caster:		Caster:	
Camber:		Camber:	
Shims #1:		Shims #1:	
Shims #2:		Shims #2:	
Shims #3:		Shims #3:	
Axle Shims:		Axle Shims:	
Frt End Width:			
Toe:			
Servo:			
Servo Saver:			

RIDE HEIGHTS:

1:		3:		Rear of Pod:
2:		4:		5:

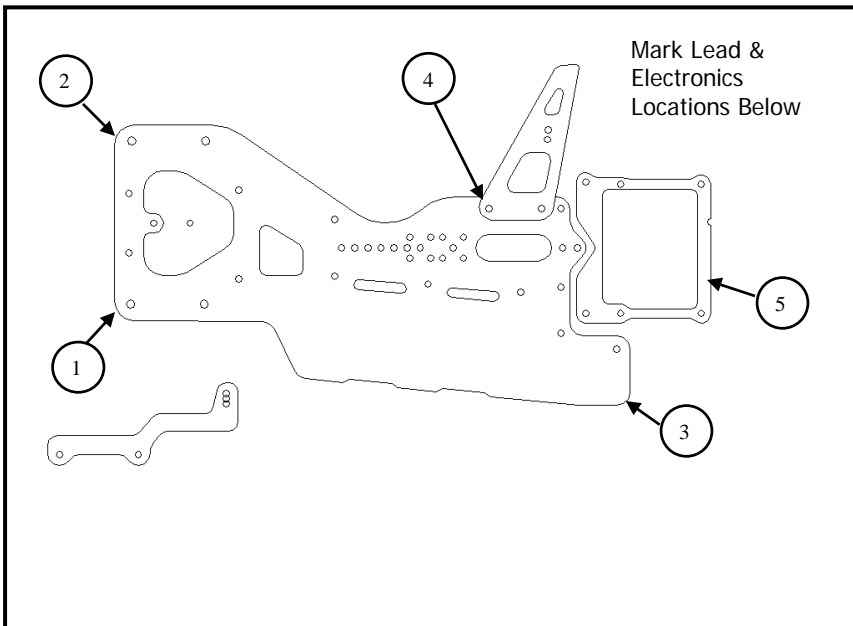

POD TYPE:	CEFX	HD
T-Bar Type:		
Rear Steer:		T-Bar Shims:
Ride Ht Adjusters:		
LR Width:		RR Width:
RR Hub Used:		

CENTER DAMPER:

Type:		
Oil:		
Damper Length:		Rear Stud Ht:
Notes:		

Left SIDE DAMPER:

Type:		
Lube:		
Inner Stud:		
Outer Hole #:		

CORNER WEIGHTS:

LF:		RF:	
LR:		RR:	

TIRES:

LF:		RF:	
Additive:		Additive:	
Amount:		Amount:	
Size:		Size:	
Camber:		Camber:	
LR:		RR:	
Additive:		Additive:	
Amount:		Amount:	
Size:		Size:	

BODY POSTS:

LF:		RF:	
LR:		RR:	

Body:		Motor:	
Position:			
<small>Spoiler to LR Body Post</small>		Pinion/Spur:	
Spoiler Ht:		Rollout:	
Wing:		Speed Control:	
Position: <small>Axle Center to Leading Edge of Side Dam</small>		ESC Settings:	
Wing Height:		Battery:	

RADIO SETTINGS:

D/R:		St Speed:	
Steering %:		Radio:	

NOTES:
