


F-14 HELLCAT SK

Driver: *Superbeam 6*
 Date: *April 3-5th* Race: *Summit - RRL Final*
 Track: *Ft. Wayne* Runline:
 Traction Level: *Med-High* Carpet Type: *025R*

Front End Type: _____

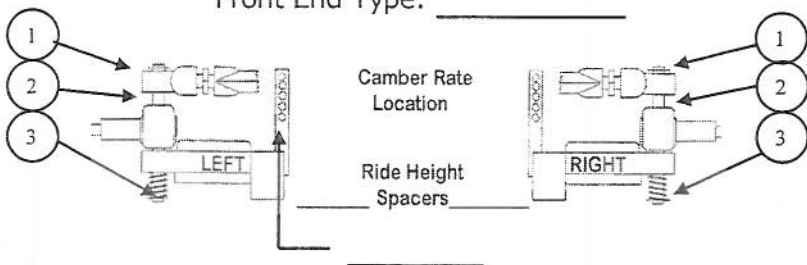

Left FRONT END: Right

Spring: <i>.018</i>	Spring: <i>.018</i>
Spring Sag: <i>0</i>	Spring Sag: <i>0</i>
Lube: <i>Heavy</i>	Lube: <i>Heavy</i>
Caster: <i>0</i>	Caster: <i>0</i>
Camber: <i>2°</i>	Camber: <i>2°</i>
Shims #1: <i>0</i>	Shims #1: <i>0</i>
Shims #2: <i>0</i>	Shims #2: <i>0</i>
Shims #3: <i>.160</i>	Shims #3: <i>.160</i>
Axle Shims: <i>.040</i>	Axle Shims: <i>0</i>


RIDE HEIGHTS:

1: <i>5.0</i>	3: <i>5.5</i>	Rear of Pod:
2: <i>5.0</i>	4: <i>6.0</i>	5: <i>7.0</i>

Frt End Width:
 Toe: *.040*
 Servo: *9650*
 Servo Saver: *BLACK*

POD TYPE: *CEFX* HD
 T-Bar Type: *hour glass*
 Rear Steer: *0* T-Bar Shims: *.100*
 Ride Ht Adjusters: *-0-*
 LR Width: *3.96* RR Width: *4.05*
 RR Hub Used: *short*

Mark Lead & Electronics Locations Below

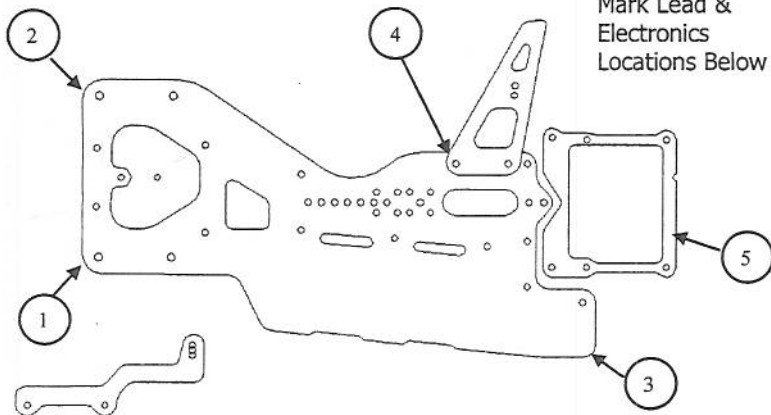

CENTER DAMPER:

Type: *Stock H.P.*
 Oil: *DIFF Lube*
 Damper Length: Rear Stud Ht: *med*

Notes:

Left SIDE DAMPER:

Type: *Stock H.P.*
 Lube: *100K*
 Inner Stud: *med*
 Outer Hole #: *Bermin*

BODY POSTS:

LF:	RF:
LR:	RR:

CORNER WEIGHTS:

LF: <i>-</i>	RF: <i>-</i>
LR: <i>320</i>	RR: <i>-</i>

Body: *STOCK* Motor: *Hand cut*
 Position: _____
Spuller to LR Body Post
 Spoiler Ht: *STOCK* Pinion/Spur:
 Wing: *-* Rollout: *3.80-3.90*
 Position: Axle Center to Leading Edge of Side Dam *-* Speed Control: *Tekin*
 Wing Height: *-* ESC Settings: *737-2000*
 Battery: *4S - Timing spec*

TIRES:

LF: <i>Spec</i>	RF: <i>-</i>
Additive: <i>model</i>	Additive: <i>-</i>
Amount: <i>Full</i>	Amount: <i>1/4</i>
Size: <i>2.10</i>	Size: <i>2.09</i>
Camber: <i>2°</i>	Camber: <i>2°</i>
LR: <i>-</i>	RR: <i>-</i>
Additive: <i>-</i>	Additive: <i>-</i>
Amount: <i>Full</i>	Amount: <i>Full</i>
Size: <i>2.12</i>	Size: <i>2.11</i>

RADIO SETTINGS:

D/R:	St Speed:
Steering %: <i>20</i>	Radio: <i>4PK</i>

NOTES:
